


Aluminium Bi-Fold Doors

Door Hinge Adjustment

Installing an Elitis Aluminium Bi-fold door requires care and attention. There are also some tricks that will help you avoid the pitfalls that so many less fastidious installers fall into.

In order to ensure smooth operation of door leaves on the Elitis Aluminium Bi-folding door, the following important guidelines must be followed when fitting:

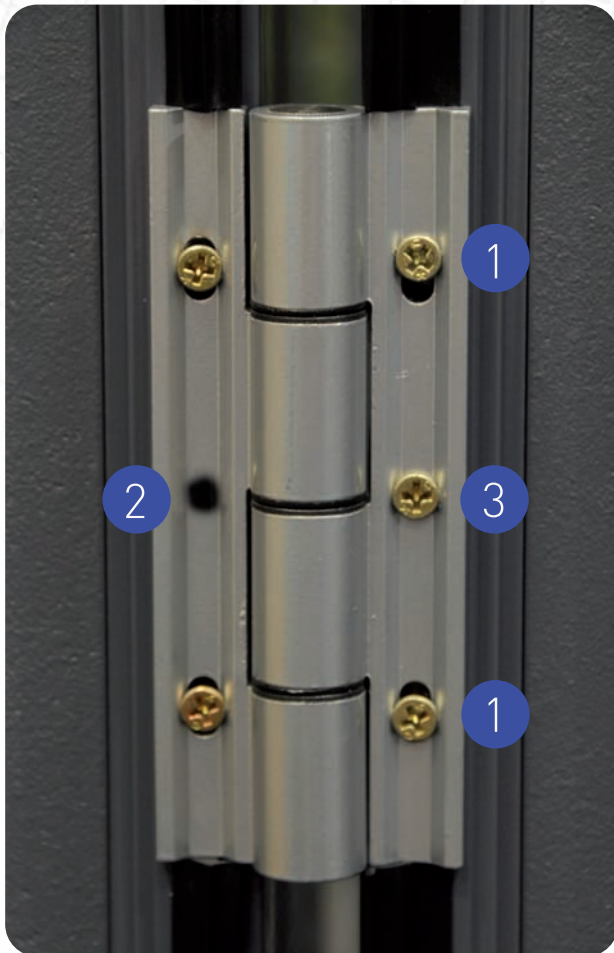

4 simple steps:

- 1 After frame is levelled, squared and fixed, check the doors operate correctly. If not, adjust the height of the leaves using top and bottom adjustment slots on the hinges
- 2 Once leaves operate correctly, drill a 4mm pilot hole in the central fixing position
- 3 Central final fixing screws on hinges MUST be fitted to all top and bottom hinges/bogies PRIOR to glazing
- 4 NB Final fixing screws must not be used on hinges at T-handle positions as screw may foul the gearing of the handle

We supply our Elitis Bi-fold doors to you pre-hung so you can spend the smallest amount of time on site. If you would like to see how to install a Bi-fold from scratch, then ask for one of our DVD's showing an installation taking place.

And don't forget that our Aluminium and Projects department are here to help. If you need to talk to someone about any aspect of installation then call 01782 391927